

FULLFLOW


FULLFLOW radiator valves are designed and manufactured to meet the requirements of commercial installations. They feature a non-rising spindle, double EPDM 'O' ring gland seals with an additional 'O' ring back seating arrangement, this enables the FULLFLOW valve to be serviced without the requirement for draining the system, perfect for commercial applications. The range includes compression and screwed iron connections. Straight and angle versions are also available. Product is only available in polished chrome.



FF1512WAC

Technical information

Dimensions

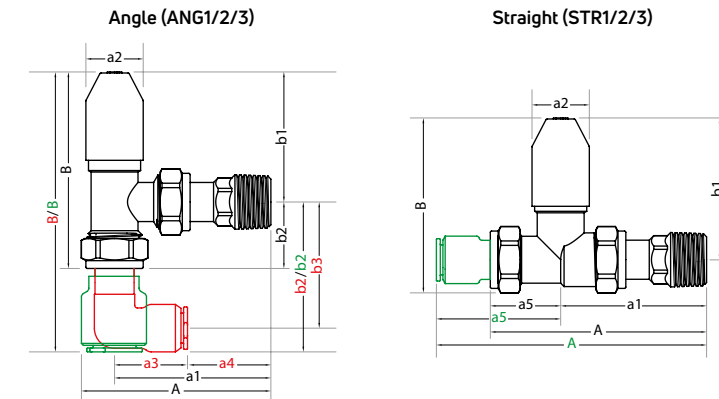

DRAWING REFERENCE: 1 = Standard (Black); 2 = Pushfit (Green & Black); 3 = Pushfit 90° Elbow (Red & Black). Drawings for illustration purposes only.

| Model | DWG Ref. | A (mm) | a1 (mm) | a2 (mm) | B (mm) | b1 (mm) | b2 (mm) |
|--------------------------------------------------------------------|----------|--------|---------|---------|--------|---------|---------|
| FULLFLOW | | | | | | | |
| 15mm / 1/2" Copper or 1/2" BSP Lockshield Angle Polished Chrome | ANG1 | 75 | 57 | 36 | 90 | 52 | 38 |
| 15mm / 1/2" Copper or 1/2" BSP Lockshield Straight Polished Chrome | STR1 | 96 | 57 | 36 | 75 | 61 | 14 |
| 15mm / 1/2" Copper or 1/2" BSP Wheelhead Angle Polished Chrome | ANG1 | 78 | 57 | 42 | 95 | 57 | 38 |
| 15mm / 1/2" Copper or 1/2" BSP Wheelhead Straight Polished Chrome | STR1 | 96 | 57 | 42 | 80 | 66 | 14 |

NB: All measurements are nominal.

General specification

- CERTIFICATION**
Produced under a quality management system - ISO 9001:2008. Conforms to BS 2767-10.
- GUARANTEE**
2 year guarantee from date of purchase against manufacturing defects.
- COLOUR**
Finished in polished chrome.
- CONNECTIONS**
Compression and screwed iron.
- OPERATING PRESSURES**
Operating pressure 10 bar.
- OPERATING TEMPERATURE**
Operating temperature 120°C.
- DELIVERY**
2 - 5 working days.



FF1512LAC

For more general information, please see page 260.

FULLFLOW

| Description | Colour (Top) | Order Code | Minimum Order Qty |
|--------------------------------------------------------------------|--------------|------------|-------------------|
| 15mm / 1/2" Copper or 1/2" BSP Lockshield Angle Polished Chrome | White | FF151/2LAC | 10 |
| 15mm / 1/2" Copper or 1/2" BSP Lockshield Straight Polished Chrome | White | FF151/2LSC | 10 |
| 15mm / 1/2" Copper or 1/2" BSP Wheelhead Angle Polished Chrome | White | FF151/2WAC | 10 |
| 15mm / 1/2" Copper or 1/2" BSP Wheelhead Straight Polished Chrome | White | FF151/2WSC | 10 |

FULLFLOW accessories

| | | | |
|-------------------------------------------|-------|------------|----|
| FULLFLOW Lockshield & Wheelhead Tops Only | White | FFLSWHTOPS | 10 |
|-------------------------------------------|-------|------------|----|

